




SCHEUCHER®

Product description Scheucher Holzindustrie GmbH

MULTIflor NOVOLOC® 5G

2-layer-parquet, according to EN13489

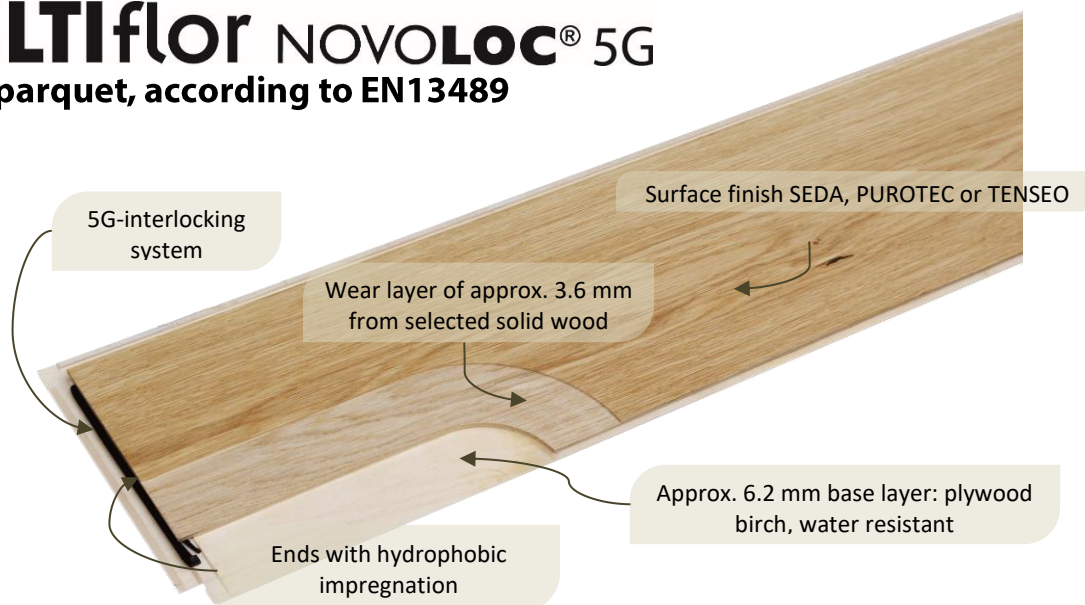

Dimensions	MULTIflor NOVOLOC® 5G 2400	MULTIflor NOVOLOC® 5G 2200	MULTIflor NOVOLOC® 5G 1800	MULTIflor NOVOLOC® 5G 1200 1-Strip / 2-Strip
[mm]	2400 x 222 x 9.8 mm	2200 x 182 x 9.8 mm	1800 x 140 x 9.8 mm	1200 x 140 x 9.8 mm
Packaging	6 pc./pack. = 3.197 m ²	6 pc./pack = 2.403 m ²	10 pc./pack = 2.520 m ²	10 pc./pack. = 1.680 m ²

- Wear layer** 1-strip from selected solid wood with a wear layer of approx. 3.6 mm ± 10% (MULTIflor NOVOLOC 5G 1200 2-Strip consists of composed lamellas)
- Base layer** Water-resistant glued plywood birch from Central European production
- Moisture content** delivered with a moisture content of 7 % +/- 2 %. according to EN 13489
- Gluing** RPU gluing, 100% formaldehyde-free, waterproof, heat-resistant
- Surface**
 - Varnished surfaces: UV-lacquers from Bona, Sweden
 - TENSEO CLASSICO** (gloss level 29±5 °GU)
 - TENSEO X-MATT** with excimer technology (gloss level 9±2 °GU)
 - PUROTEC** with excimer technology (gloss level 5 ±1°GU)
 - Naturally oiled surface:
 - SEDA** Our oils/waxes are based on natural raw materials and dry purely by oxidation, are not film-forming and partially repairable.
 - Further details on surface treatments can be found in the respective data sheets.

Installation Glue-down installation with NOVOLOC® 5G interlocking system

fire protection class C_{fi}-s1 at glue-down installation

Scheucher Holzindustrie GmbH

Zehensdorf 100 | A-8092 Mettersdorf | Telefon: +43-3477-2330-0 | Fax: +43-3477-2330-16 | info@scheucher.at | www.scheucher.at
Es gelten die Verkaufs- und Lieferbedingungen der Scheucher Holzindustrie GmbH | Gerichtsstand Graz | Firmenbuchnr. 66065 f. | UID: ATU 30252605




SCHEUCHER®

Product description Scheucher Holzindustrie GmbH

Underfl. heating Suitable, $R_T = 0.058 \text{ m}^2\text{K/W}$, please pay attention to our specifications for the installation above underfloor heatings.

Room climate Room temperature should be kept at a constant of 18–24°C and the relative humidity between 30% und 65%! This generally requires an appropriate air humidification in the heating season. We therefor recommend cold humidifiers with an integrated sterilization system. The installation of a Fidbox records your climate above and under your parquet floor, reports deviations from the optimum climate and can be conveniently monitored by mobile app.

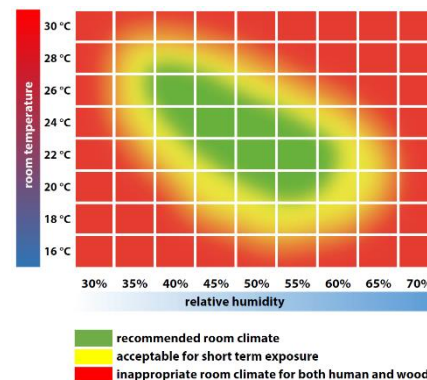

Fields of use Floors and walls, living and object area (meet the highest class C according to. ÖN C2354)