



Product description / Scheucher Holzindustrie GmbH

MULTIflor NOVOLOC® 5G 500-60° / 740-45°

2-layer parquet, 1-strip - Chevron optics according to EN 13489

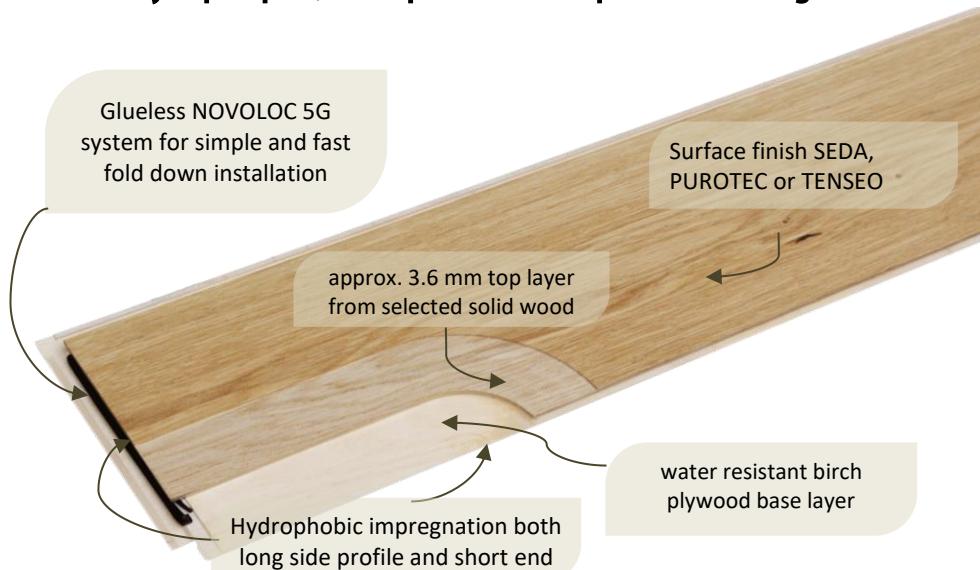

MULTIflor 740:



740 x 140 x 9.8 mm with 45°,
14 pcs./pack = 1.45 m² / pack

MULTIflor 500:



500 x 140 x 9.8 mm with 60°,
14 pcs./pack = 0.98 m² / pack

Product	Multilayer parquet flooring for glue down installation produced according European Standard EN 13489 „Multilayer-parquet“
Top layer	1-strip from selected solid wood of approx. 3.6mm ± 10%
Base layer	Water-resistant glued birch plywood from Central European production
Wood moisture	delivered with a moisture content of: u = 7 ±2% according EN 13489 RPU-
Gluing	glue, 100% free of formaldehyde, resistant to water and heat impacts
Surface	Varnished surfaces: UV-lacquers from Bona, Sweden TENSEO CLASSICO (gloss level 29±5 °GU) TENSEO X-MATT with excimer technology (gloss level 9±2 °GU) PUROTEC with excimer technology (gloss level 5 ±1°GU) Naturally oiled surface: SEDA Our oils/waxes are based on natural raw materials and dry purely by oxidation, are not film-forming and partially repairable. Further details on surface treatments can be found in the respective data sheets.
Weight	Approx. 9 kg/m ² , approx. 13 kg per pack for MULTIflor 740 and approx. 9 kg for MULTIflor 500
Installation	Glue-down installation with NOVOLOC 5G fold down locking system
Fire resistance	C _{fl} -s1




SCHEUCHER®

Product description / Scheucher Holzindustrie GmbH

Underfloor heating Very well suitable, $R_T = 0.058 \text{ m}^2\text{K/W}$

Room climate Room temperature should be kept at a constant of 18–24°C and the relative humidity between 30% and 65%. This generally requires an appropriate air humidification in the heating season. We therefore recommend cold humidifiers with an integrated sterilization system. The installation of a Fidbox® records your climate above and under your parquet floor, reports deviations from the optimum climate and can be conveniently monitored by mobile app.

Field of use Floors and walls, living and object area (meets the highest class C according to ÖN C2354)

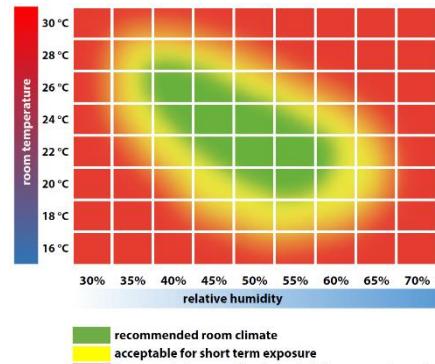

MULTIflor 500-60° Oak NATUR

Due to the 60° angle of this Chevron flooring, its natural grading appears particularly elegant. Natural, minimal colour differences as well as a few small knots create a calm overall-view, which supports the beauty of impeccable oak wood in all its facets.


Grading Natur corresponds to the “free class” according to the European product standard EN 13489.

With the exception of knots, Natur is similar to O



SCHEUCHER®

Product description / Scheucher Holzindustrie GmbH

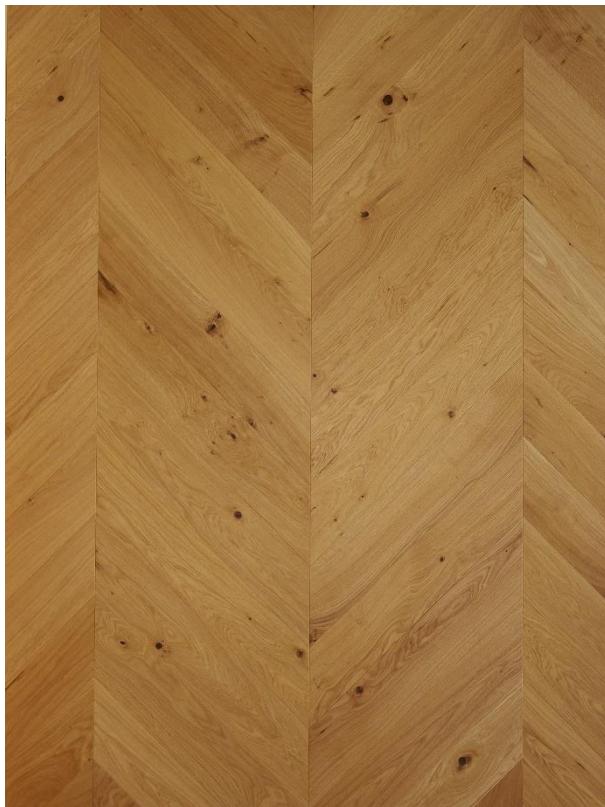

MULTIfloor 740-45° Oak COUNTRY

In this larger dimension, the classical 45° angle comes into action. Country grading features lively optics with all kind of knots, small cracks, inclusions, thus creating a natural rustic look. The uniqueness of each plank gives us the opportunity to take part in a decades-long history of the growth of our precious Oak wood.

Description of gradings in compliance with EN 13489

COUNTRY corresponds to the „free class“ according to EN 13489. With the exception of knots, Country is similar to



Tabelle 1 - Sortierregeln für Quercus spp. (Eiche)

Merkmale	Oberseite des Elements		Klasse
	O	A	
Gesunder Splint	Unzulässig	Zulässig bis 50 % der Oberfläche, verteilt	Allle Merkmale ohne Einschränkung hinreichend
Aste gesund und festverwachsen	Zulässig, wenn Durchmesser ≤ 3 mm	Zulässig, wenn Durchmesser < 8 mm	Größe oder Menge zulässig, sofern sie die Festigkeit oder Haltbarkeit des Parkett-Rohdes nicht beeinträchtigen.
Fauläste	Durchmesser ≤ 1 mm, sofern sie nicht in Gruppen auftreten	Durchmesser ≤ 2 mm	
Seichte Risse	Unzulässig	Zulässig bis 20 mm Länge je Stab	
Rindeneinwuchs	Unzulässig	Unzulässig	
Blitzrisse	Unzulässig	Unzulässig	
Faserneigung	Keine Einschränkung zulässig	Uneingeschränkt zulässig	
Farbunterschiede	Geringfügige Unterschiede	Zulässig	
Markstrahl	Zulässig	Zulässig	
Schadlingsbefall	Unzulässig	Unzulässig	Unzulässig mit Ausnahme von Bläue und schwarzem Fraßgang
Nicht sichtbare Teile			
Alle Merkmale ohne Einschränkung hinreichend Größe oder Menge zulässig, sofern sie die Festigkeit oder Haltbarkeit des Parketts nicht beeinträchtigen.			
• Risse in Achsen und Achsenrichtungen verfüllt werden.			
• Risse werden zu Gruppen zusammengefasst, wenn ihre Ränder nicht mehr als 30 mm voneinander entfernt liegen.			

Scheucher Holzindustrie GmbH

Zehendorf 100 | A-8092 Mettersdorf | Telefon: +43-3477-2330-0 | Fax: +43-3477-2330-16 | info@scheucher.at | www.scheucher.at
Es gelten die Verkaufs- und Lieferbedingungen der Scheucher Holzindustrie GmbH | Gerichtsstand Graz | Firmenbuchnr. 66065 f. | UID: ATU 30252605